ALTA RECYCLING

600 Thomas Dr, Bensenville, IL 60106
(630) 477-4044

THE SAFETY OF OUR EMPLOYEES AND DRIVERS IS OUR NUMBER ONE PRIORITY.

Acceptable Load Patterns

inside view from back of trailer



Load bales squarely on top of bottom bales.



Load bales squarely on top of bottom bales.
Leave 1-2" clearance from sides and 4" from top of trailer.



One vertical bale on side.
Leave 1-2" clearance from sides and 4" from top of trailer.

BIRDS EYE VIEW
Stagger rows left and then right.

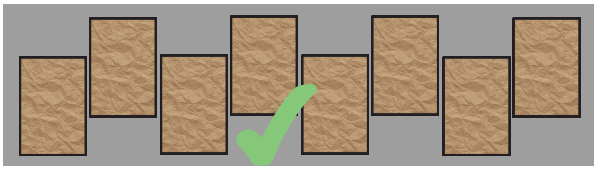

Unacceptable Load Patterns

inside view from back of trailer



Do not stack partially on bottom bales.



Do not stack large bales on top of smaller bales.
Top bale is too large.

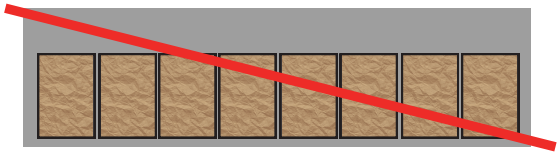

Never load all material on one side or the other.

BIRDS EYE VIEW

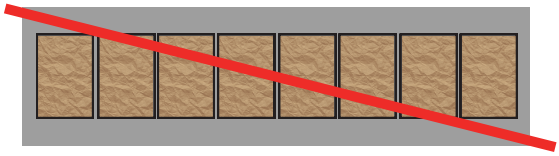

Never load straight down the middle as load may shift on sharp turns.

The last row of bales should *ALWAYS* be turned lengthwise to prevent bales from falling/shifting against the door during transit.
The last row of bales must be no more than 2 bales high.